



Tough, Powerful, Portable, Professional Power from Schumacher


- Ultra Powerful High Performance Hawker AGM Batteries, as standard
- Isolating on/off switch
- Audible Alarms signal, reverse polarity, over voltage (to protect 12v versions) Connection reminder
- Two function digital display, indicates internal and vehicle's battery voltage and % of charge when charging internal batteries; also indicates charging system's voltage while engine running
- External 2 amp automatic charger for fast safe charging and maintenance

Models	Peak Amps	Starting Amps	Starting Output After 5 seconds	Cranking Amps	Cable Gauge	Cable Length CM	Output	Weight	Dimensions
PBI2212	1900A	545A	510A @ 5sec	225	4G	127cm	12volts	9.74Kg	38x35.6x12cm
PBI3612	4400A	910A	865A @ 5sec	330	2G	139.7cm	12volts	19.64Kg	38x35.6x19.6cm
PBI3624	3800A	690A	620A @ 5sec	265	2G	139.7cm	24volts	19.64Kg	38x35.6x19.6cm
PBI4424	4400 12v 3800 24v	910/690A	865/620A @ 5sec	480-12v/300-24v	2G	139.7cm	12/24volts	19.64Kg	38x35.6x19.6cm

Schumacher UK Ltd.
 Crypton House, Bristol Rd, Bridgwater, Somerset, TA6 4SY UK
 Tel: +44(0)1278 459293 E-mail sales@schumacheruk.com
 web www.speedcharge.co.uk



Recessed control panel to protect On/Off and selector switch. LCD display shows battery state of charge and battery voltage, and charging system voltage of started vehicle to aid diagnosis

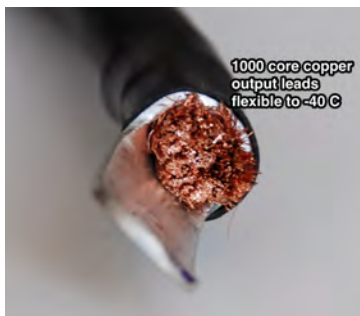

1000 core pure copper leads, to transmit as much power as possible with minimum electrical resistance. Advanced chemical resistant coating means the leads remain flexible in extreme cold



Copper jaws linked with heavy duty conductor, for maximum power transmission.

User replaceable jaws minimises replacement cost and downtime



Fully automatic specialist charging programme developed by Schumacher for the Hawker Energysys battery to maximise charge and battery life, complete with automatic de-sulfation procedure and float charge mode.