



BRIEF INFORMATION

Jumbo 320 Xenon Auxiliary Driving Light with LED Position Light



PRODUCT CHARACTERISTICS

- Xenon driving light with HID light and position light using LED technology with 6 high-performance LEDs and external ballast.
- The extended and detachable high-energy wiring harness allows for flexible and easy installation.
- ECE type-approved high-beam (E1) 1741 and (E1) 1655.
- Weight: 2,200 g

SCOPE OF DELIVERY

- Xenon driving light
- Integrated D2S HID light
- Xenon ballast
- Professional wiring harness
- Fixing materials
- Installation instructions

Driving light, 12V (ref. 37.5)
Driving light, 24V (ref. 37.5)

1FE 008 773-021
1FE 008 773-051

ACCESSORIES

Protective cap*

8XS 160 353-001

*In some countries, protective caps are not permitted by law. Before use on public roads, please inquire with the responsible authority.

PRODUCT RANGE



Jumbo 320 FF

H7 driving light with position light comprising 6 high-power LEDs with bluish-white light. ECE type-approved high-beam (E) 1741 and (E) 1655. Weight: 1,200 g.

Driving light, 12 V or 24 V (ref. 37.5)

1FE 008 773-081



Jumbo 320 FF

H7 driving light with ECE type-approved high beam (E) 1655.
H7 front fog light with ECE type approval (E) 1689. Weight: 1,200 g.

Driving light (ref. 37.5) with position light
Driving light (ref. 37.5)
Driving light (ref. 17.5)
Front fog light (no picture)

1FE 008 773-041
1FE 008 773-001
1FE 008 773-011
1NE 008 773-031



Jumbo 320 Blue



H7 driving light with blue cover lens. With ECE type approval (E) 1655. Weight: 1,200 g.

Driving light, 12 V or 24 V (ref. 37.5)

1FE 008 773-061

LIGHT DISTRIBUTION

Jumbo 320 Xenon (Ref. 37,5)

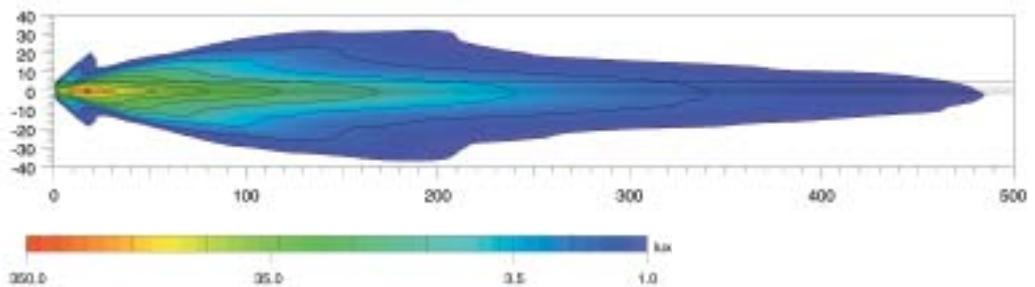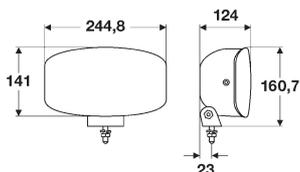

Installation: Standing or suspended. Angle of inclination -10° to $+100^{\circ}$

Lux is the unit of illuminance. It specifies the luminous flux emanating from the light source that hits a specific surface. For example, an office work station is supposed to be illuminated using at least 500 lux and at 1 lux the human eye can still read a newspaper without problems. The values under the lux bar indicate where the corresponding illuminance is achieved on the light distribution diagrams.

Ref. 50, 40, 37.5, 17.5 and 12.5: The reference number (Ref. is a value associated with driving lights. According to ECE regulation, this reference number must not exceed the upper limit of 75 per vehicle. This figure is based on the two values for the standard high beam (left and right headlights), plus the value for any additional driving lights installed. The value is entered on the lens of approved headlights.